


Ozone Sounding with Radiosonde RS41

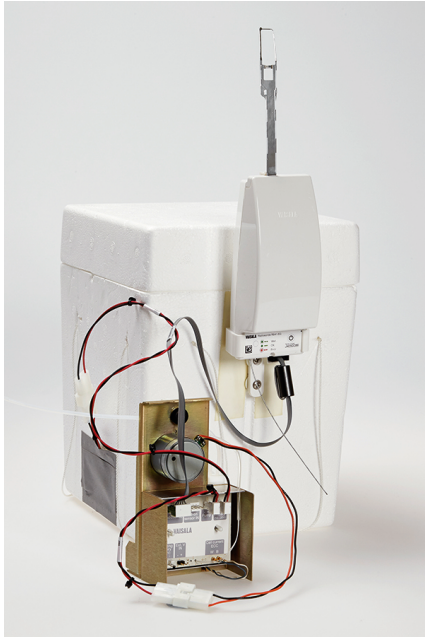

Features

- Reliable and accurate ozone measurement for synoptic sounding and atmospheric research
- Sharp vertical resolution and a fast sampling rate
- An ozone interface kit is available for combining a RS41 radiosonde and ozone sensor
- Easy start for ozone sounding; automatic retrieval for many set-up parameters
- Prevention of ozone box freezing by heating with an additional lithium battery

The ozone sounding set-up comprises an ozone sensor connected via an ozone interface to Vaisala Radiosonde RS41-SG or RS41-SGP. With Vaisala Ozone Interface OIF411, an ECC-type ozone sensor, and a digital RS41 radiosonde it is possible to measure pressure, temperature, humidity, and geopotential height, as well as the vertical distribution of atmospheric ozone up to 3 hPa. Winds are measured using GPS navigation signals.

Ozone sensors

Two ECC-type ozone sensors, Science Pump Corporation model ECC6AB and EN-SCI Model Z, can be connected to Vaisala Radiosonde RS41. The Science Pump Corporation ozone sensor is available via Vaisala. It measures ozone using the principle of iodide redox reaction to release electrons and is the most commonly used ozone sensor in the world today.

Ozone Interface Kit RSA411

Vaisala Ozone Interface Kit RSA411 is used for ozone sounding with Vaisala Radiosonde RS41 and an ECC-type ozone sensor. The kit is built around Vaisala Ozone Interface OIF411. The other peripherals in the kit include a radiosonde holder, cables for connecting the devices, a detainer for the radiosonde unwinder, and a stabilizer for use with certain parachute models.

Ozone Interface OIF411

Vaisala Ozone Interface OIF411 has five measurement channels and is powered by the radiosonde battery. Two channels are dedicated to the ozone sensor current and ozone pump temperature measurement, providing the data for ozone partial pressure calculation. OIF411 provides two diagnostic tools for the ozone pump: battery performance can be monitored with the pump voltage measurement, and pump performance with the pump motor current. These measurements are useful in verifying that the ozone sensor is functioning properly and that ozone measurements are valid.

In addition, there is one channel for external voltage measurement that can be used freely for voltages from 0 to 12 V.

In very low ambient temperatures the liquid in the ECC cells may freeze during the flight, ending the ozone sounding before the radiosonde reaches important ozone layers in the stratosphere. To avoid this, OIF411 is able to control the heating of the ozone sensor box based on the temperature measured from the pump base.

The heating is powered by an additional battery with a voltage range from 9 to 19 V. The recommended battery is a 9 V square lithium battery that can easily be fitted onto the ozone sensor frame inside the ozone box.

OIF411 also has a serial interface for additional sensors, which can be chained, and the data transferred via OIF411 to a RS41 radiosonde and further to Vaisala Sounding System MW41.

Ground equipment

RS41-based ozone sounding is performed with Vaisala Sounding System MW41. The sounding system calculates the ozone partial pressure profile and integrated total ozone using raw ozone data and other radiosonde measurements. In addition, the sounding system offers many useful features for ozone sounding preparation, data processing, and data messaging. The ozone data is automatically stored to enable post-ascent processing, and performing simulations is easy with the MW41 sounding software. System maintenance can be performed by Vaisala under the terms of a Vaisala Service Contract.

Technical data

Ozone Interface Board OIF411

For use with	Science Pump Corporation ECC6AB ozone sensor and EN-SCI Model Z ozone sensor
Synchronization	All channels are measured in synchronization with the meteorological measurements (pressure, temperature, humidity, wind)
Compatibility	Vaisala Radiosonde RS41-SG Vaisala Radiosonde RS41-SGP

Ozone current channel

Ozone current measurement	0 ... 14 µA
Combined uncertainty	0.2 % of the reading, minimum 3 nA
Resolution	0.1 nA
A/D conversion resolution	16 bit

Ozone temperature channel

Ozone temperature measurement (specification fulfilment)	-5 ... +60 °C
Temperature measurement uncertainty ¹⁾	0.2 °C
Temperature measurement resolution	0.01 °C

¹⁾ Based on sensor specifications

Other functions

Pump voltage measurement	0 ... 19.7 V
Pump voltage measurement uncertainty ¹⁾	1.5 % of the reading, minimum 0.1 V
Pump current measurement	0 ... 300 mA
Pump current measurement uncertainty ¹⁾	2.5 %, of the reading, minimum 3 mA
External voltage measurement	0 ... 12.0 V
Resolution	0.1 V
Input resistance	111 kΩ
Heating of the ozone box	Controlled by software
Heating battery voltage range	9 ... 19 V
Heating start temperature (at the pump)	+5 °C
Heating stop temperature (at the pump)	+7 °C
Operating temperature in ozone sounding	-90 ... +60 °C
Dimensions (L × W)	Max. 100 × 70 mm
Cable length	380 mm
Weight with cable	Max. 50 g
Power consumption	< 50 mA (from radiosonde battery)

¹⁾ 2-sigma (k=2) confidence level (95.5%) including uncertainties of the electrical components.

Add-on sensor support

Protocol support	Xdata to connect several sensors in the same chain, data transferred via OIF411 to RS41
Transfer rate	Max. 200 bytes/s

Technical information on ozone sensors

The technical specifications for the ozone sensors available through Vaisala are given by the respective manufacturers. The sensors have been used up to an altitude of 40 km or 3 hPa. The measurement time is limited to 2-3 hours due to evaporation of the sensor liquids. The temperature inside the ozone sounding (flight) box must be above 0 °C. For more information on the accuracy of a particular ozone sensor, please contact Vaisala or the ozone sensor manufacturer directly.

Science Pump Corporation model ECC6AB ozone sensor

Dimensions (including weatherproof ozone sounding flight box)	191 × 191 × 254 mm
Weight (including battery)	600 g
Operating temperature (inside ozone sounding flight box)	0 ... +40 °C
Operating pressure	Ground level to 3 hPa
Storage, self-life, warranty	Two-year warranty from the day of delivery

Compliance

Compliance marks	CE
------------------	----

Accessories and consumable items

Vaisala offers all the accessories and spare parts needed for ozone sounding. A start-up kit that contains everything you need to introduce ozone sounding to your upper-air sounding program is available. For more information on the start-up kit, please contact Vaisala.

Ozone sounding training

Vaisala offers training in ozone sounding. Please contact your Vaisala representative for more information.

The performance data is expressed with 2-sigma (k=2) confidence level (95.5 %), if not otherwise specified.

VAISALA

www.vaisala.com

Published by Vaisala | B211388EN-D © Vaisala 2021

All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. Any reproduction, transfer, distribution or storage of information contained in this document is strictly prohibited. All specifications — technical included — are subject to change without notice.